



Stainless steel pull bars combine stylish design with long-lasting finishes and proven strength. They have been corrosion resistance tested to over 1000 hours and is the only pull bar range on the market to include a duo finish.



ALU-DOOR GLAZING SOLUTIONS

All Alu-Door profiles feature a polyamide thermal break that enhances the thermal performance of the profile and improves the overall U-Value. Profiles feature EPDM high quality gaskets and weather brushes to aid weather resistance. Alu-Door complies with the requirements of Building Regulations Document L 2010. Security is assured by multi-point lock mechanisms on main opening sashes. Alu-Doors have the option of either low thresholds for unimpeded, easy access, or rebated thresholds that offer improved weather resistance. Alu-Doors are available in a choice of standard or non-standard colours dual colour also Alu-Doors Unique Textured range of finishes.


- DESIGN & COLOUR**
- A Range of 10 designs
 - Full Range of Ral Colours & Unique Textured Range
 - Up to 25-year guarantee on paint finishes
 - Internally Glazed glazing cassettes
 - Fully thermally broken Outer frame and Sash

- MANUFACTURE**
- Pressure Bonded onto a thermally efficient core
 - 2mm thick Aluminium Skins laser cut to desired design
 - Double Glazed 4mm glass unit, U-Value of 1.1 W/m²K


- HARDWARE**
- Choice of Long Pull Stainless Steel handle or Lever / Lever
 - Black Butt Hinges
 - Choice of letter plate colours

- TESTS**
- Water Test Class E, 750Pa
 - Wind Class 4 1800Pa
 - BS 6375-1:2009
 - Pass 24:2012
 - Multisafe Stainless Steel Fuhr Lock Din 18251-3
 - Overall U Value of 1.4W/m²K

- DIMENSIONS**
- Frame Depth 80mm
 - Typical Sight Line 102mm
 - Max o/a height 2500mm
 - Max o/a Width 1200mm

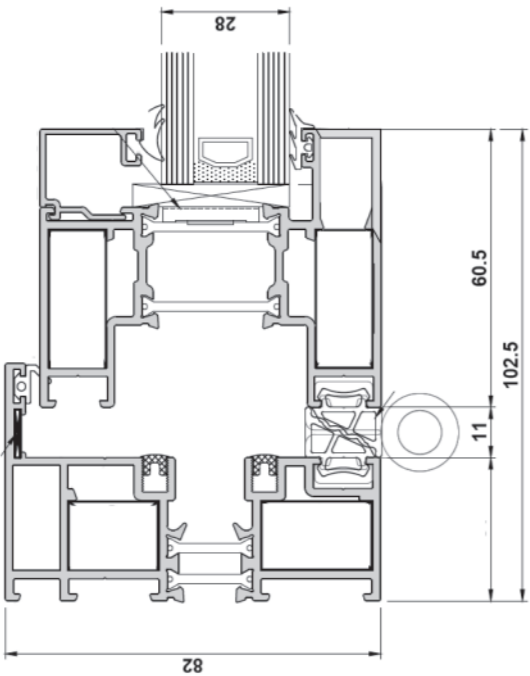

STYLES FIVE OF THE BEST

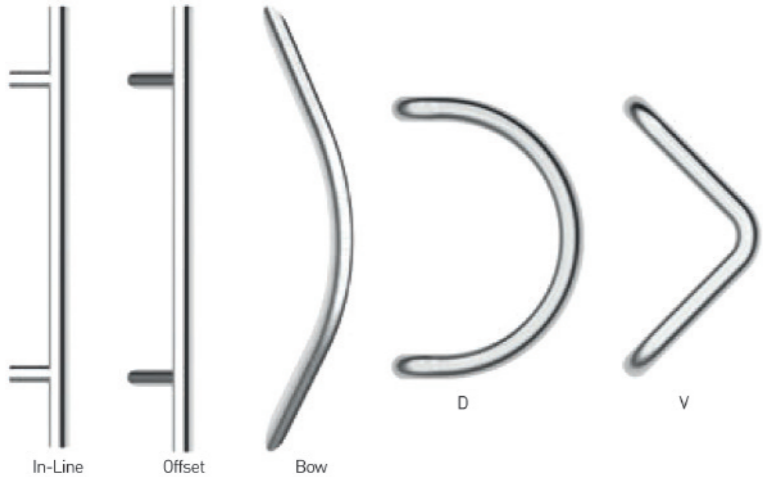

COLOUR SWATCHES



DESIGN EXAMPLES



DOOR STYLES

